

EASYFIX


DOUBLE GLAZING



THE MODERN METHOD OF THERMAL INSULATION

Reduces heat loss by as much as 65%.

HINTS ON FIXING

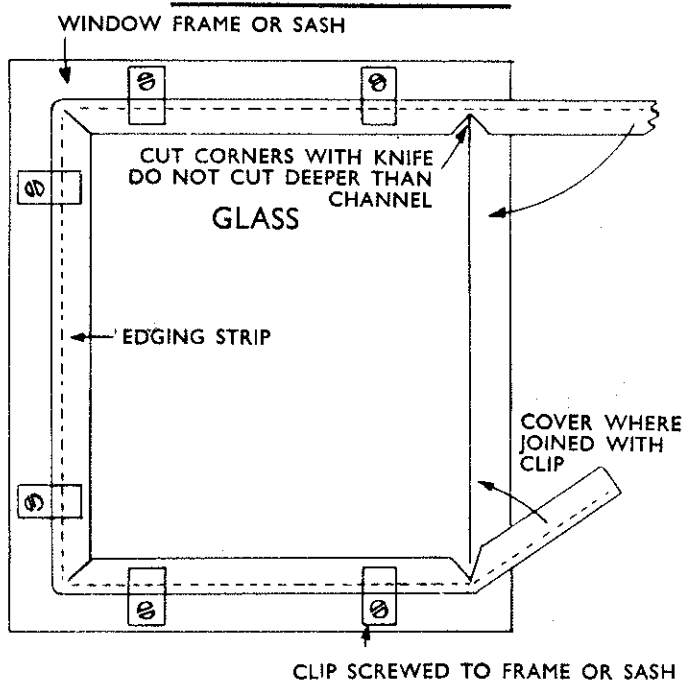

PRICE LIST

RETAIL

EDGING STRIP	-	8d per foot
COUPLING STRIP	-	10d per foot
NYLON TURN - BUTTON (WITH WOOD SCREWS)	-	3d each
FIXING CLIPS (WITH 2 B.A. SELF-TAPPING SCREWS FOR METAL WINDOWS)	-	3d each

Double-Glazing may be fixed to frame or sash—both methods are equally effective.

When ventilation is required, always fix direct to sash.

Where metal frames have no wood surrounds, fix double glazing on outside of metal window by drilling 1/8" holes to take self-tapping screws.



4 Page leaflet with fixing instructions provided.

FREE DISPLAY STAND